



### Advantages/Benefits

- ▶ When de-energized, outlet port exhausted or pressurized
- ▶ Body materials: brass, polyamide
- ▶ Fast response times
- ▶ Compact design

### Design/Function

Type 301 is available in a variety of different circuit functions for different applications.

When energized, the solenoid armature is drawn against a spring.

The flow path through the valve is dependent on the chosen circuit function. The solenoid epoxy encapsulation efficiently dissipates the heat generated by the coil.

### Applications


- Neutral gases and liquids
- Pneumatic control
- Vacuum
- Shut-off, dosing, filling and ventilating
- Small scale instruments, laboratory and measuring equipment
- Gas control, welding equipment

**burkert**  
*Easy* Fluid Control Systems


## Technical Data

### Circuit Function

**C** 3/2-way valve, when de-energized outlet port A exhausted



**D** 3/2-way valve, when de-energized outlet port B pressurized



### Body Material

Body and seat of brass  
Body and seat of polyamide

### Specifications

| Orifice<br>DN<br>[mm] | Kv-Value<br>Water<br>[m <sup>3</sup> /h] | QNm-Value<br>Air <sup>1)</sup><br>[l/min] | Pressure Range <sup>2)</sup><br>[bar] | Weight                |                  |
|-----------------------|--|---|---------------------------------------|-----------------------|------------------|
|                       |  |   |                                       | threaded port<br>[kg] | sub-base<br>[kg] |
| 1,2                   | 0,045                                    | 48  | 0-10                                  | -                     | 0,09             |
| 1,6                   | 0,060                                    | 65  | 0- 6                                  | 0,12                  | 0,09             |

<sup>1)</sup> Measured with 6 bar upstream pressure and 1 bar pressure drop across the valve at +20 °C.

<sup>2)</sup> Also suitable for technical vacuum.

All pressures quoted are gauge pressures with respect to the prevailing atmospheric pressure.

### Operating Data (Valve)

#### Seal Materials/Fluids Handled/Temp.- Range

**NBR** Neutral fluids, e.g. compressed air, water, hydraulic oil, oils and fat without additives, town gas, -10 to +90 °C

For more detailed information please refer to resistance chart (Leaflet-No. 1896009).

Max. ambient temperature + 55 °C

Max. viscosity 21 mm<sup>2</sup>/s

Response times opening 12 ms  
closing 8 ms

Times measured at outlet A from switching on until pressure rise to 90 % / pressure drops to 10 % at a max. working pressure of 6 bar.

Port connection sub-base or manifold and G 1/8 banjo coupler for direct installation to remotely piloted valves

### Operating Data (Actuator)

Operating voltages 24, 230, 240 V/50 Hz  
12, 24 V/=

Voltage tolerance ±10 %

Power consumption AC 9 VA (inrush)  
6 VA/ 4 W (hold)  
DC 4 W or 2 W depending on version

Duty cycle 100% continuously rated for manifold assembly use reduced switch-on time or 2-W- version

Cycling rate up to 1000 c.p.m

Rating with cable plug, cable or lead IP 65

### Installation / Accessories

Installation as required, but preferably with solenoid system upright


Electrical connection

- plug connection without cable plug (supplied as standard)
- moulded-in cable on request
- moulded-in flying leads 3 x 0,75 mm<sup>2</sup>, on request
- moulded-in flying leads 2 x 0,75 mm<sup>2</sup>, on request

# 3/2-Way Miniature Solenoid Valve, Sub-base connection

# Type 301

## Dimensions in mm

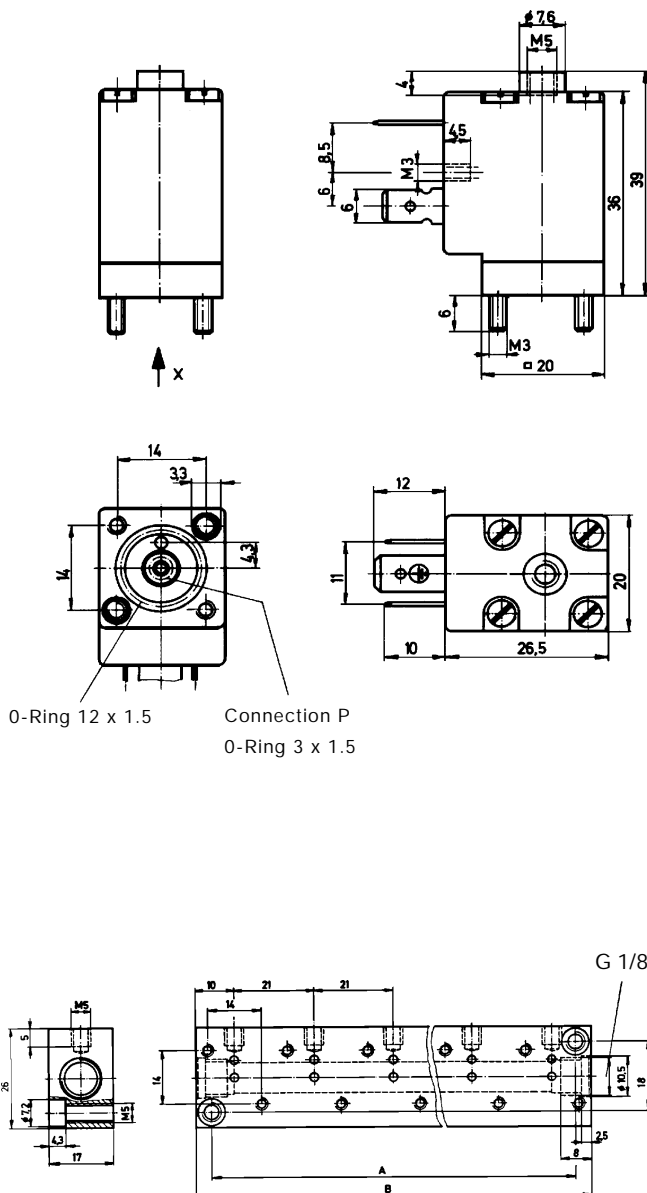

## Connections

All illustrations in this data sheet show valves of circuit function C, using the connections P, R and A. These connections may vary with the circuit function D as indicated in the following overview.

| Circuit Function | Connections |   |   |
|------------------|-------------|---|---|
| C                | P           | R | A |
| D                | R           | P | B |

i.e. the pressure port for circuit function D is located on the top of the valve.

## Multiple Manifold Assembly

The manifolds have a common pressure inlet P (R) for the pressure connection of Type 301-C or the exhaust connection of Type 301-D and an individual lateral outlet A (B) for each valve. Type 301-C may also be mounted together with Type 201 valves. They can however not be mounted with Type 301-D valves. The electrical connection can be either on the right or left of the manifold.

Manifolds may be coupled together using special push-fit O-ring connecting nipples for linking the pressure inlets P (R). Manifolds joined together in this way should be securely mounted.

## Order-Code for Manifold

| Manifold  | Hole Spacing |     | Order-No. |
|-----------|--------------|-----|-----------|
|           | A            | B   |           |
| 1 valve   | 12           | 20  | 005 312 T |
| 2 valves  | 33           | 41  | 005 355 E |
| 3 valves  | 54           | 62  | 005 313 U |
| 4 valves  | 75           | 83  | 005 314 V |
| 5 valves  | 96           | 104 | 005 315 W |
| 6 valves  | 117          | 125 | 005 316 X |
| 7 valves  | 138          | 146 | 005 893 K |
| 8 valves  | 159          | 167 | 005 166 Z |
| 9 valves  | 180          | 188 | 005 241 C |
| 10 valves | 201          | 209 | 005 819 Y |
| 11 valves | 222          | 230 | 005 242 D |
| 12 valves | 243          | 251 | 005 222 Z |

## Order-Code for Accessories

| Specification                                 | Order-No. |
|---|-----------|
| Connector nipples with NBR-O-rings (8 x 1,25) | 005 040 A |
| 3-pin cable plug, IP 65 rating                | 005 377 C |

# 3/2-Way Miniature Solenoid Valve, Sub-base connection

## Type 301

### Ordering Chart (Other Versions on Request)

| Circuit Function | Orifice DN [mm] | Flow Rate                          |                               | Port Connection [ISO 228] | Pressure Range <sup>2)</sup> [bar] | Body Material | Seal Material | Weight [kg] | Voltage/Frequency [V/Hz] | Order-No.                 |     |       |        |                         |
|------------------|-----------------|------------------------------------|-------------------------------|---------------------------|------------------------------------|---------------|---------------|-------------|--------------------------|---------------------------|-----|-------|--------|-------------------------|
|                  |                 | Water Kv-Value [m <sup>3</sup> /h] | Air <sup>1)</sup> QNn [l/min] |                           |                                    |               |               |             |                          |                           |     |       |        |                         |
| C                | 1,0             | 0,030                              | 33                            | Sub-base                  | 0-7                                | Brass         | NBR           | 0,09        | 024/=                    | 086 514 F <sup>3)</sup>   |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 024/50                   | 054 627 X                 |     |       |        |                         |
|                  | 1,2             | 0,045                              | 48                            | Sub-base                  | 0-10                               | PA            | NBR           | 0,09        | 110/50                   | 054 348 P                 |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 230/50                   | 054 345 C                 |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 240/50                   | 054 346 D                 |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 024/=                    | 054 917 J                 |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 024/=                    | 052 327 Y <sup>4)</sup>   |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 024/=                    | 042 974 X                 |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 024/=                    | 045 239 H <sup>4)5)</sup> |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 024/50                   | 044 450 G <sup>4)</sup>   |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 024/50                   | 045 137 K                 |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 110/50                   | 052 326 X <sup>4)</sup>   |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 110/50                   | 042 999 Z                 |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 230/50                   | 052 325 W <sup>4)</sup>   |     |       |        |                         |
|                  | 1,6             | 0,060                              | 65                            | Sub-base                  | 0- 6                               | Brass         | NBR           | 0,09        | 230/50                   | 057 082 L                 |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 240/50                   | 079 866 G <sup>4)</sup>   |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 240/50                   | 054 915 Q                 |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 012/=                    | 067 386 T                 |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 024/=                    | 042 870 B                 |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               |             | 024/50                   | 042 872 Z                 |     |       |        |                         |
| 110/50           |                 |                                    |                               |                           |                                    |               |               |             | 054 032 N                |                           |     |       |        |                         |
| 230/50           |                 |                                    |                               |                           |                                    |               |               |             | 057 597 M                |                           |     |       |        |                         |
| 1,6              | 0,060           | 65                                 | Sub-base                      | 0- 6                      | PA                                 | NBR           | 0,09          | 240/50      | 061 554 V                |                           |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               | 024/50      | 049 755 J                |                           |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               | 024/=       | 055 941 T                |                           |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               | 110/50      | 066 853 W                |                           |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               | 230/50      | 056 437 K                |                           |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               | 240/50      | 086 486 C                |                           |     |       |        |                         |
|                  |                 |                                    |                               |                           |                                    |               |               | G 1/8       | 0- 6                     | Brass                     | NBR | 0,175 | 024/=  | 062 240 P <sup>6)</sup> |
|                  |                 |                                    |                               |                           |                                    |               |               |             |                          |                           |     |       | 230/50 | 044 141 W <sup>6)</sup> |
| D                | 1,6             | 0,060                              | 65                            | Sub-base                  | 0- 4                               | Brass         | NBR           | 0,06        | 024/=                    | 062 407 U                 |     |       |        |                         |

<sup>1)</sup> Measured with 6 bar upstream pressure and 1 bar pressure drop across the valve at +20 °C,

<sup>2)</sup> also suitable for vacuum, <sup>3)</sup> 2-W power consumption, <sup>4)</sup> available with manual override,

<sup>5)</sup> 3 moulded-in PVC-single strands 0.75 mm<sup>2</sup>, length 300 mm, <sup>6)</sup> Pilot valve mounted to banjo-coupler.

DTS 1000010923 EN Version: A Status: RL (released | freigegeben | validé) printed: 24.10.2016