


CONFIDENTIAL

This drawing and design together with any and all information relating in any way whatsoever to the subject matter or this document is strictly confidential and remains the proprietary information of Kumera or its clients. Recipient agrees to keep such information confidential and not disclose it to any third party nor to reproduce the information in whole or in part, nor to commercially exploit the information in any way, without the written consent of Kumera.

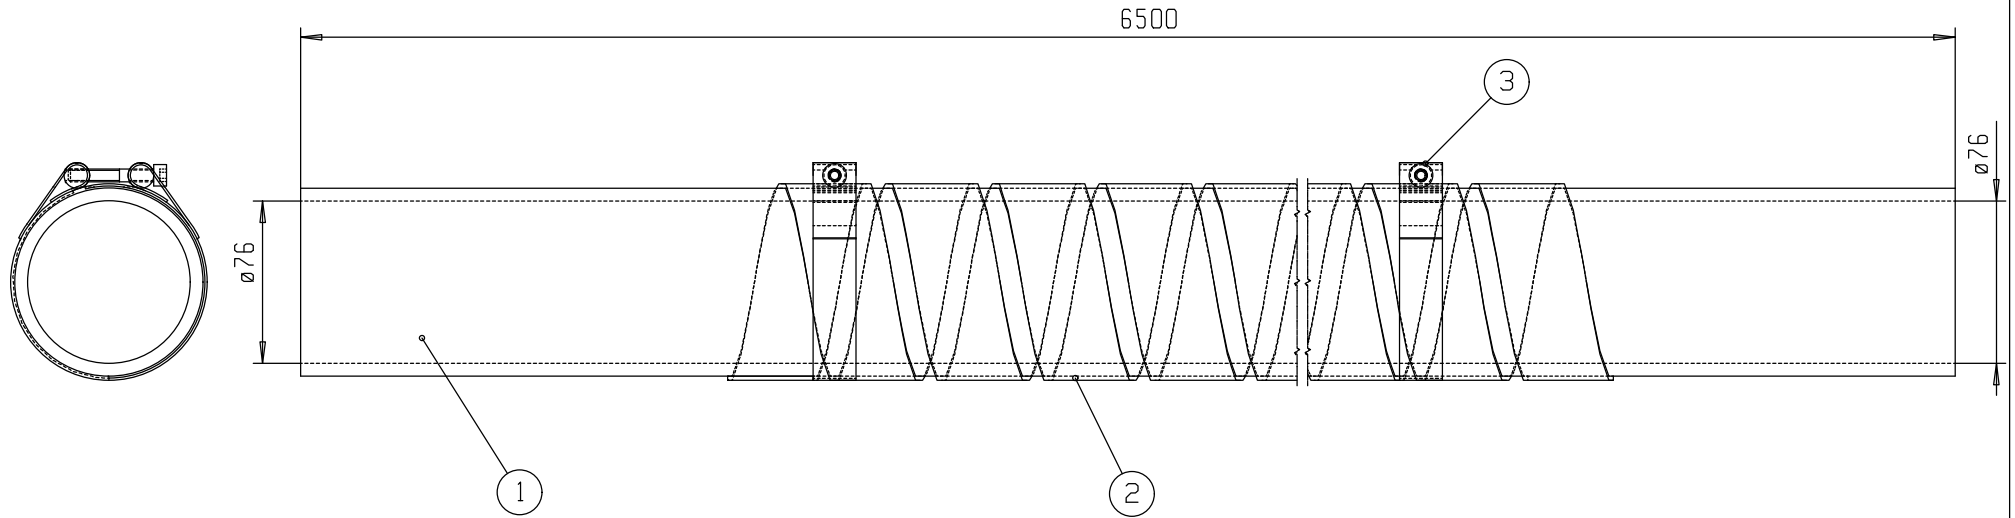

Operating temperature $-40^{\circ}\text{C} - +100^{\circ}\text{C}$
 Operating pressure 14 bar

Notice!
 Catalog HI-FLEX.
 Can replace other manufacturer product.

REVISION												
Tolerances												
Length	≤6	≤30	≤120	≤315	≤1000	≤2000	≤4000	≤8000	≤12000	≤16000	≤20000	>20000
Machined constr. DIN 7168 BL1 medium	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4	±5	±6	
Welded constr. DIN 8570 BL1 B			±2	±2	±3	±4	±6	±8	±10	±12	±14	±16

3	4	Hose clamp	-----	03-SS201-090	
2	1	Flexible spiral	-----	08-MPS-075M-20	
1	1	Inlet hose (HI-FLEX)	06-202AA-076	Lenght 6.5 m	14.0
					Tot.Weight [kg] = 14.0 kg
No.	Pcs	Description	Dwg.no.,Stand.	Size,Model	Weight,Note
		KUMERA	Scale	Designed	Checked
		Technology Center	1:2.5	2016-06-09	2016-06-09
		FIN-11100 RIIHIMÄKI-FINLAND		mki	nlu
		Project/Product		Approved	2016-06-09
		Equipment for Anode Furnace $\varnothing 4.22 \times 11.1\text{m}$		nlu	
		Drawing title	Dwg.no.	Net weight [kg]	Registry
		HOSE ASSEMBLY		15	CAD
				Replaces the drawing	
				Included in	
				Sheet	Revision
				1/1	