


- DC input with fuse
- Single output

Option:

- DC-OK with relay
- Decoupling diode in the (+) output line
- Series diode in the (+) input line with leaded out cathode

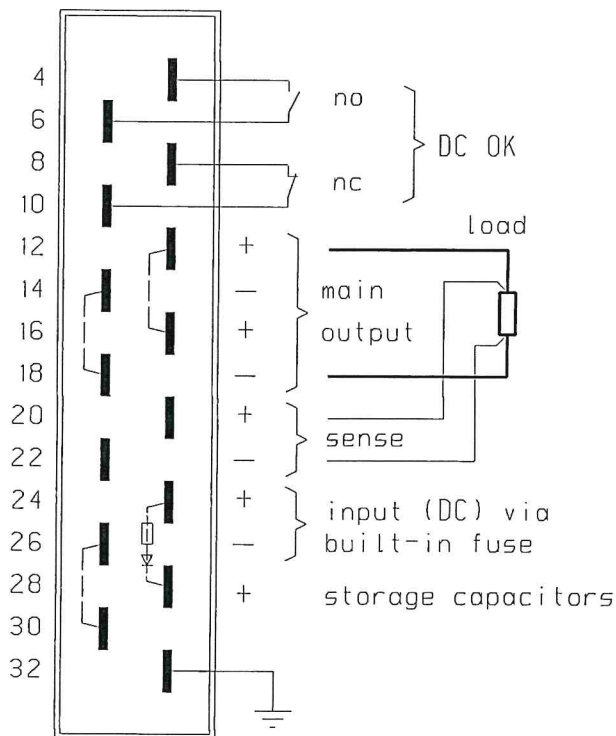

rear view
connector H15 DIN41612

Remote sense pins have to be connected to the output either at the module or at the load under regard of polarity.

The pins of the connector are rated 15 A max. At higher currents pins internally parallel connected must also be paralleled externally at the mating connector.

At pin 28, a capacitor memory card can be connected. In case of failure of the input voltage, the built-in diode prevents a fed back into the input supply.

