



## Vertical Diaphragm Valves TS5620 Series

The TS5620 Series Vertical Diaphragm Valves are designed to dispense low to medium viscosity fluids with precision accuracy over a wide range of shot and bead sizes, down to a fraction of a micro liter.

An internal spring return makes the valves fully adaptable for use with Techcon Systems controllers. A short opening stroke provides extremely fast, positive shut-off. An external stroke control adjustment makes it easy for the operator to fine tune shot sizes. The compact design allows for mounting flexibility and easy integration into automated applications.

The seal-less valve design features excellent moisture sensitive resistance and the incorporated diaphragm creates a barrier between the wetted parts and the air cylinder.

With a choice of UHMWPE (Ultra High Molecular Weight Polyethylene), Delrin® or Teflon® fluid bodies, the TS5620 Series Valve can handle a wide range of industrial fluids.



### Key Features & Benefits

- Long cycle life
- Compact size and weight
- Excellent moisture sensitive resistance
- Choice of body for chemical compatibility

### Typical Applications

- Dispensing Anaerobic thread locker onto screw threads
- Dispensing Cyanoacrylate in bonding applications
- Applying a of UV lacquer in CD/DVD spin coating applications (using Delrin® fluid housing)

## TYPICAL SETUP

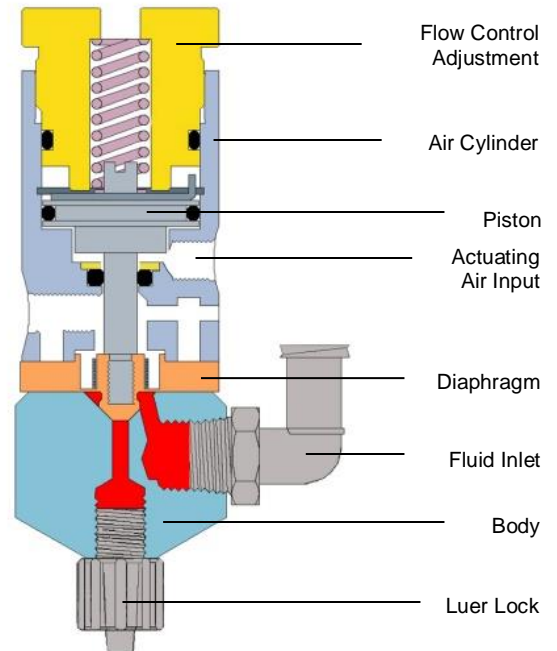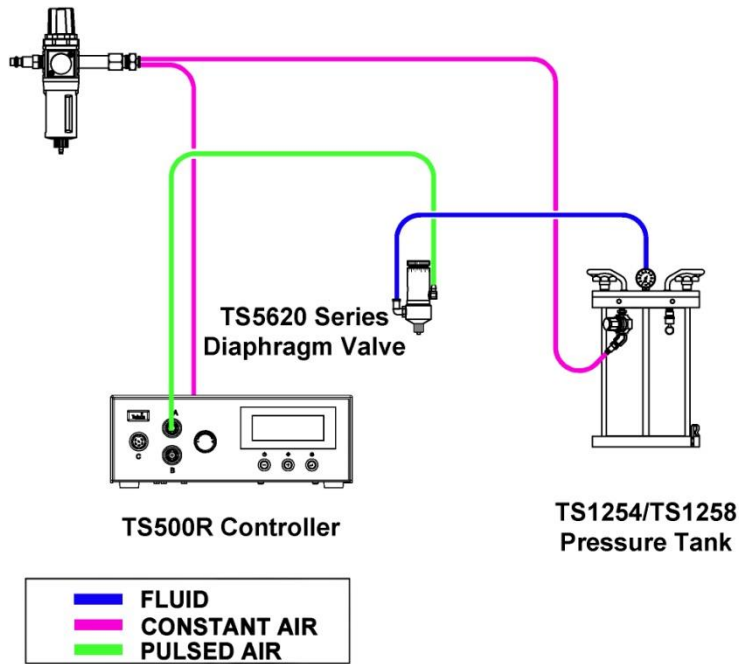

## SPECIFICATIONS & PART NUMBERS

	<b>TS5620 Series</b>
Size (Imperial):	See drawing
Size (Metric):	See drawing
Weight:	See below
Fluid Inlet Port:	1/8" NPT female
Fluid Outlet Port:	Luer lock male
Aux Air Inlet Port:	10-32 UNF female
Activation Pressure Range:	70 psi - 90 psi
Max Fluid Pressure:	(4.8bar - 6.2bar)
Operating Frequency:	70 psi (4.8bar)
Mounting Port:	400+ cycles/min.
Viscosity Range:	10-32 UNF female


Teflon® is a registered trademark of E.I. DuPont. Version 2.00

Wetted Parts	TS5622VU	0.14 lb (64g)	UHMWPE
And Weight	TS5622VT	0.18 lb (80g)	Teflon®
	TS5622VD	0.16 lb (71g)	UHMWPE, Delrin®
			(UHMWPE = Ultra High Molecular Weight Polyethylene)

## For Sales & Support

**Techcon Corporate Headquarters**  
 10800 Valley View Street, Cypress  
 California, 90630, USA.  
 Tel: 1-714-230-2398  
 E-mail: oemorders@okinternational.com

**Techcon European Corporate Office**  
 Eagle Close, Chandler's Ford Industrial Estate,  
 Eastleigh, Hampshire, SO53 4NF, UK.  
 Tel: +44 2380 489 100  
 E-mail: europe-orders@okinternational.com

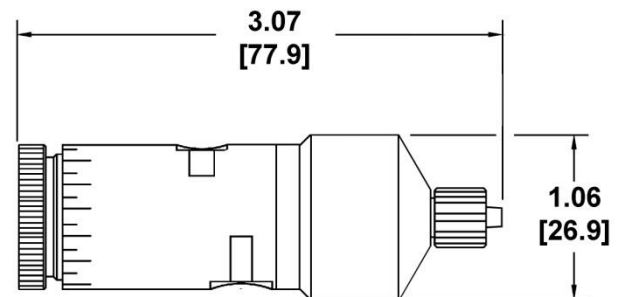

Dimensions are in inches [mm]

The dispenser is shipped with the following items:

- Mounting bracket kit
- Valve air hose
- Luer lock fluid line
- Fluid inlet fittings - 1/4" compression and Luer lock type
- Dispensing tip selection pack

## ACCESSORIES

- **Fluid reservoirs:** The valve can be fed from the TS1254 or TS1258 Pressure Tank, or from any size syringe barrel or cartridge.
- **Dispensing Tips:** For the complete TE dispensing tip offering please visit [www.techconsystems.com](http://www.techconsystems.com)