

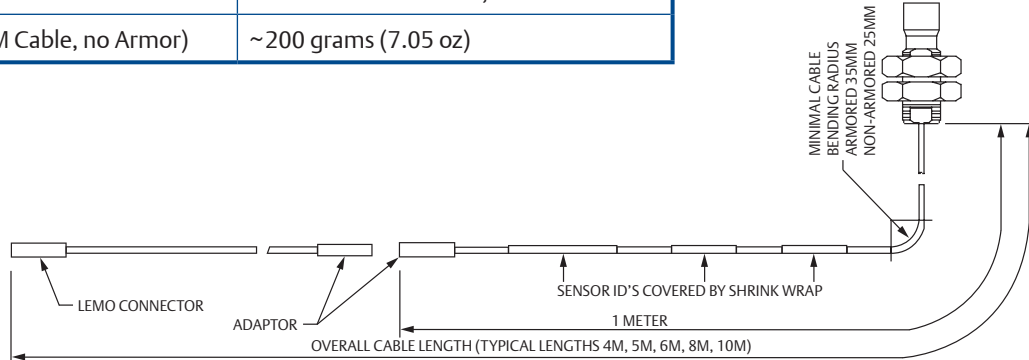


16mm Eddy Current Sensor

Non-contact sensor designed for critical turbomachinery applications such as steam, gas and hydro turbines, compressors, pumps and fans to measure radial and axial shaft dynamic displacement; position, eccentricity and speed/key.

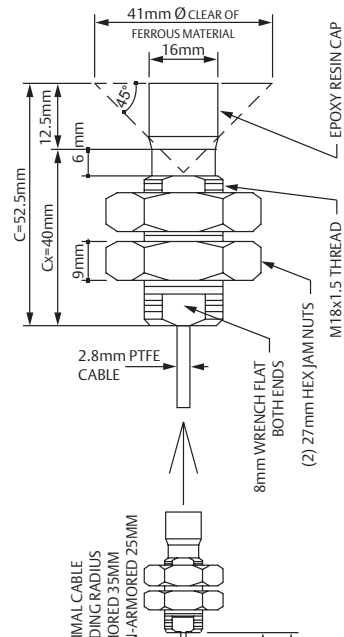

Dynamic Performance		
Sensitivity/Linearity		4 V/mm (101.6 mV/mil) \pm 1.5%
Air Gap (Center)		Approx. 2.7 mm (0.11") Nominal
Long Term Drift		< 0.3%
Range:	Static	\pm 2.0 mm (0.079")
	Dynamic	0 to 1,000 μ m (0 to 0.039")
Target		
Target/Surface Material		Ferromagnetic Steel (42 Cr Mo4 Standard)
Maximum Surface Speed		2,500 m/s (98,425 ips)
Shaft Diameter		\geq 80mm
Environmental		
Operating Temperature Range		-35 to 180°C (-31 to 356°F)
Temperature Excursions <4 Hours		200°C (392°F)
Maximum Cable Temperature		200°C (392°F)
Temperature Error		<4%/100°K (API 670 Compliant)
Pressure Resistance to Sensor Head		10,000 hPa (145 psi)
Shock and Vibration		5g @ 60Hz @ 25°C (77°F)
Physical		
Material		Sleeve – Stainless Steel, Cable – PTFE
Weight (Sensor & 1M Cable, no Armor)		~200 grams (7.05 oz)

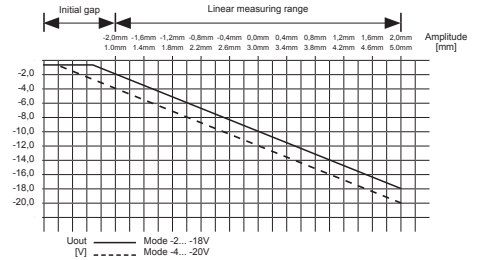

Compliance and Certifications	
CE	2014/30/EU 2014/34/EU 2011/65/EU EN61326-1 DIN EN 50581
ATEX	EN 60079-0 EN 60079-11
IEC-Ex	IEC 60079-0 IEC 60079-11 IEC 60079-26
CSA	CAN/CSA-C22.2 NO. 0-M91 CAN/CSA-C22.2 NO. 157-92 CAN/CSA-C22.2 NO. 213-M1987 CAN/CSA-E60079-15-02 (R2006) CAN/CSA-C22.2 NO. 25-1966 CAN/CSA-C22.2 NO. 61010-1-04 ANSI/UL Standard 913-2004 ANSI/UL Standard 1604-1995 UL 60079-15 2002 UL 61010-1

Hazardous Area Approvals

Compliance and Certifications	
ATEX / IEC-Ex	Area classification depends on converter, see converter documentation for details, sensor temperature classification: T6: Ta ≤ 84°C T4: Ta ≤ 114°C T3: Ta ≤ 160°C
CSA	Area classification depends on converter, see converter documentation for details, sensor temperature classification: T6: Ta ≤ 64°C T4: Ta ≤ 114°C T3: Ta ≤ 160°C
Non-sparking (nA)	
CSA	Area classification depends on converter, see converter documentation for details, sensor temperature classification: T6: Ta ≤ 64°C T4: Ta ≤ 114°C T3: Ta ≤ 160°C

Order Matrix		PR6424	X	X	X	-	X	X	X
Sleeve Thread	M18x1.5	0							
Armored Cable	WITH WITHOUT		1 0						
Total Sensor Length C=Cx +12.5mm	0(Cx=40mm), 1(50), 2(60), 3(70), 4(80), 5(90), 6(100), 7(110), 8(120), 9(130), A(140), B(150), C(160), D(170), E(180), F(190), G(200), H(210), J(220), K(230), L(240) M(250), N(260), P(270), Q(280), R(290)			X					
Adaptor Plug	WITH WITHOUT						0 1		
Total Cable Length	0(4m), 1(5m), 2(6m), 3(8m), 4(10m)							X	
Cable End	LEMO OPEN								0 1

©2016, Emerson Process Management. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. All other marks are the property of their respective owners.

The contents of this publication are presented for informational purposes only, and while every effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice.

**Emerson Process Management
Reliability Solutions**
835 Innovation Drive
Knoxville, TN 37932 USA
☎ +1 865 675 2400
🌐 www.emersonprocess.com/csi

